


Ferrite Load CPR284G

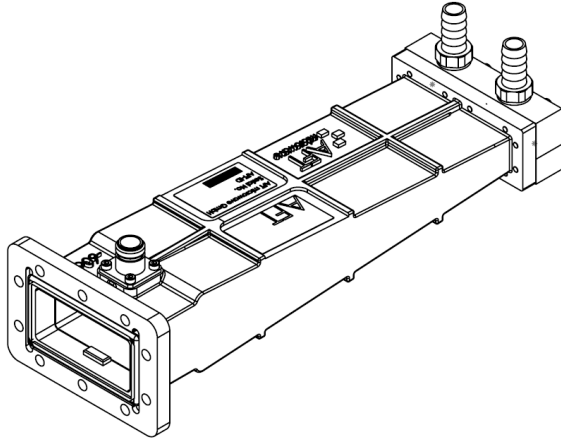

- Solid-state ferrite absorber, water cooled
- Broadband & temp.-stable absorption
- Excellent peak & average power capability
- Cooling water separated from the RF avoiding water to enter the waveguide
- High reliability & long life-time
- Free of maintenance & wear parts
- RoHS compliant
- Designed for S-band LINACs operating at 2856 MHz and 2998 MHz

Parameter	Value			
Footprint Drawing No.	FP-10073544			
Product Type	RF Load			
Configuration	Ferrite load			
Center Frequency f_0	2856 MHz and 2998 MHz			
Bandwidth BW	± 10 MHz			
Input Power	Options:	Xp = 1	Xp = 2	Xp = 3
Input Peak Power		4 MW	6 MW	35 MW
Input Average Power		4 kW	6 kW	6 kW
Return Loss	≥ 30 dB			
VSWR	< 1.065			
RF Waveguide	WR284			
RF Flanges / Connectors	CPR284G, grooved, 10 holes $\varnothing 6.5$ mm			
RF Coupling Probes	1x non-directional coupling probe at input			
	Coupling: $-60\text{dB} \pm 2\text{dB}$, Connector type: N-female			
Cooling System	demineralized water			
Water Tube Materials	Stainless steel			
Water Connectors	2x $\frac{1}{2}$ " hose barb fittings, stainless steel			
Water Inlet Temperature (nominal)	selectable between 20°C and 40°C			
Water Inlet Temperature Range	$\pm 5^\circ\text{C}$			
Water Flow Rate	≥ 600 l/h @ 6kW, ≥ 400 l/h @ 4kW			
Water Pressure Drop	< 2 bar @ 600 l/h			

Ferrite Load CPR284G

Water Inlet Pressure	≤ 10 bar	
Water Leak Test Pressure	15 bar for 10min	
Waveguide Dielectric Filling Gas	SF6	
Gas Pressure	nominal:	3 bar absolute
	maximum :	4 bar absolute
Gas Leak Rate (Helium)	< 5·10 ⁻⁴ mbar l/s	
	tested with Helium pressurization at 2.5 bar gauge	
Ambient Temperature	operating :	10°C to 40°C
	storage :	0°C to 60°C
Relative Humidity	< 80%, non-condensing	
Magnetic Stray Field	device must not be exposed to magnetic stray radiation of >5G	
Body Material	Aluminium	
Surface Finish	none	
Dimensions	see footprint drawing	
Weight	2.5 kg ± 10%	
Mounting Orientation	any	
Accessories included	1x metallic gasket p/n 1-0002998000-000	

Ordering Code
LF-WR284-02-2927 - Xp - Xw

Variable	Description	Value Options		
Xp	Input Power Option	1 : 4 MW / 4 kW	2 : 6 MW / 6 kW	3 : 35 MW / 6kW
Xw	Water Inlet Temp. [°C]	20 .. 40		

Notes:

- 1 Water quality, temperature, flow, and input pressure need to be controlled carefully according to the specified values. Air bubbles in the cooling channel have to be avoided. The device does not include any sensorics and interlocks for water temperature, flow or pressure.
- 2 Low-Power Acceptance Tests: The following tests will be performed at the AFT factory before shipment: (1) small-signal network analyzer measurements of input return loss vs. frequency at room temperature, (2) water leak test, and (3) He-gas leak rate testing.
- 3 Documentation: An owner's manual is supplied for providing information on the installation, operation and maintenance of the device. The documentation will also include specification, footprint drawing, an inspection report and a test data plot (viewgraphs of S-parameters vs. frequency).

Rev.	Remark	Date	Name
00	Initial	17.08.2015	C. Weil
01		17.09.2015	C. Weil
02	Flow rate, weight, documentation	03.04.2020	C. Weil